# **SANTA FE ULTRA155**



The **Ultra155** features a patented heat exchanger technology that allows the dehumidifier to remove up to 155 pints of water a day, and provide fresh air ventilation while using only an unprecedented 8 amps (7.3 pints per Kilowatt hour). Ideal for larger homes, the unit effectively and efficiently dehumidifies up to 3500 square feet.

### MODEL 4031070

#### **FEATURES**

- + Extremely energy efficient
- + Engineered for low temperature operation providing comfort year round
- + Use of DEH 3000/R digital control for outdoor air ventilation and humidity control
- + Superior MERV-13 filtration to improve indoor air quality
- + Ducting option for fresh outdoor air ventilation
- + Push button reset for transformer protection



BUILT TO LAST. POWERED TO PROTECT.

#### PERFORMANCE

Water Removal	@ 80°F and 60%RH	@ 73°F and 60%RH
	155 Pints / 19.375 Gallons	104 Pints / 13 Gallons
Efficiency	7.3 Pints/kWh	5.5 Pints/kWh
Energy Factor	3.4 L/kWh	2.6 L/kWh
Blower	391 CFM @ 0.0" WG 363 CFM @ 0.2" WG 337 CFM @ 0.4" WG	
Fan	165 Watts	
Operating Temperature	49°F Min., 95°F Max.	
Sizing	Up to 3,500 Sq. Ft. / 35,000 Cu. Ft.	

### ELECTRICAL

Power	920 watts @ 80°F and 60% RH	
Supply Voltage	115 volt – 1 phase – 60 Hz	
Current Draw	8.0 amps	
Power Cord	9', 115 VAC, Ground	Plug Type B (USA, MEX, CAN, JPN)
Circuit Requirement	15 Amp dedicated	

### SPECIFICATIONS

Duct Connections	6" Round Inlet, 10" Round Inlet, 10" Oval Outlet
Drain Connection	3/4" Threaded Female NPT
Refrigerant	R410A, 1 lb. 13 oz.
Unit Dimensions	20.25"W x 21.75"H x 41.5"D
Unit Weight	140 lbs.

### SHIPPING

Shipping Dimensions Shipping Weight Pallet Quantity UPC Number Shipping Options 25"W x 28"H x 42"D 162 lbs. 1 per pallet 859029004687

LTL



Specifications are subject to change without notice. Performance is based on pints / gallons per day. Sizing is based on 10 foot ceiling height. Unit dimensions and weight are with collars on. \* Previously the Ultra Aire 155H.

### SANTA FE DEHUMIDIFIERS



# Whole House Dehumidification for Comfort, Health and Property Protection

According to experts, controlling humidity inside the home is essential for whole home comfort, reducing health risks, and protecting the structure of the home and its contents. While the air conditioning in your home will remove moisture from the air, it only does so when it is running for a significant amount of time, and never to a set relative humidity. Newer systems offer dehumidification but in reality they are only overcooling to try to remove more moisture.


Indoor humidity levels can rise dramatically when outside temperatures are moderate, and the air conditioner is not running. The Santa Fe Ultra Series Whole House Ventilating Dehumidifiers are the solution to healthy, comfortable living.

# Comfort

Addressing comfort in the home is very important to your family's quality of life. High humidity can cause us to feel either hot and sticky or cold and clammy, while also contributing to musty odors in the home.

# Health

According to the *Environmental Protection Agency*, health problems associated with poor indoor air quality include eye irritation, allergies, headaches and respiratory problems such as asthma. The chart below shows that 50 percent is the optimum relative humidity level during the humid times of the year when it comes to protecting your health.

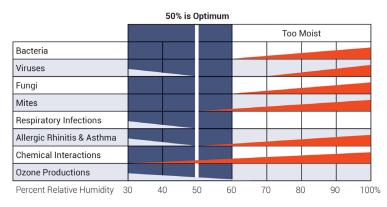

### **Property Protection**

Maintaining humidity levels below 60 percent is one of the most important steps in protecting a home and its contents. Excess moisture in the home can cause musty odors and be detrimental to wood floors, furniture, artwork, electronics, and even the home's overall structure.

# **The Solution**

The Santa Fe Ultra Series Whole House Ventilating Dehumidifiers provide dedicated dehumidification, optional mechanical outdoor air ventilation, and superior MERV 13 filtration to create an indoor environment that is healthy, comfortable, and protected. Manufactured in Madison, WI, these commercial-grade units are energy-efficient and backed by an industry-leading 6-year warranty.